

MINT TWO
TS036

INSTALLATION INSTRUCTIONS



SAFETY SYMBOLS

The following warning signs warn you of dangerous situations and their severity:



DANGER!

High Risk, Lethal Hazards, Severe Injuries



WARNING!

Medium Risk, Severe Injuries



CAUTION!

Low Risk, Minor Injuries



NOTE!

Damage to Property

TARGET READERSHIP AND INSTALLER QUALIFICATIONS

Installation must be carried out by qualified professionals.
Repairs should only be performed by trained and qualified persons.



NOTE!

Follow all local installation regulations and country specific voltage and plumbing standards. DO NOT install the intelligent toilet in rooms where there is a danger of frost. The room temperature and water temperature must not be less than 4°C (39 °F).

Condensation may form when the intelligent toilet is brought from a cold location to a warm one. Leave the unit switched off for a few hours before operating.



DANGER!

Risk of fatal electric shock

The appliance must be grounded and plugged into a GFCI outlet.
DO NOT remove individual components from (inside of) the intelligent toilet.
If the unit has a damaged cord or plug, return the product to a service center for repair. The cord or plug may only be changed by qualified personnel.



CAUTION!


DO NOT reuse old hoses. Please use new hoses and included components.
Axent Corp is not liable or responsible for damaged caused by 3rd party components

TECHNICAL SUPPORT


For any questions or any assistance with this product, please contact your dealer or call us at
1-949-250-4576
support@axentproducts.com
www.axentbath.us

SCOPE OF DELIVERY


Standard delivery contents

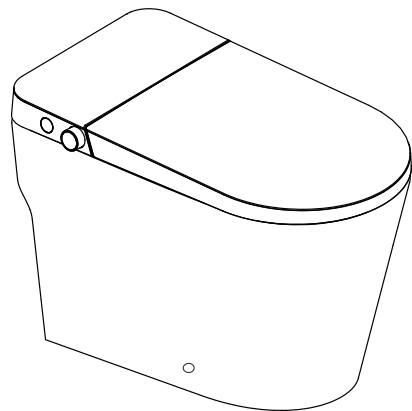


Main body

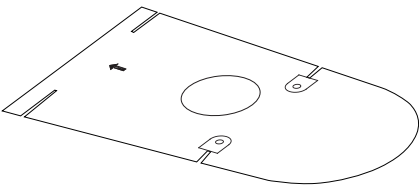


Installation template




Installation Manual




User Manual



Filter




Battery




Bowl Mounting Hardware



Bowl Plug




Remote Control



Remote Control Holder



Holder and Anchor Bolt



Remote Control Mounting Hardware




The below parts are not included with the toilet.



Wax Ring


INSTALLATION

1

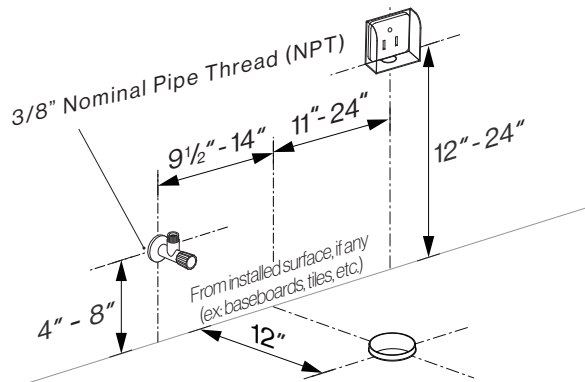


! Please verify these dimensions before beginning installation. These dimensions may vary in some locations. Recommended operating pressure 15 - 108 psi.

2




! Please run water until clear.

3


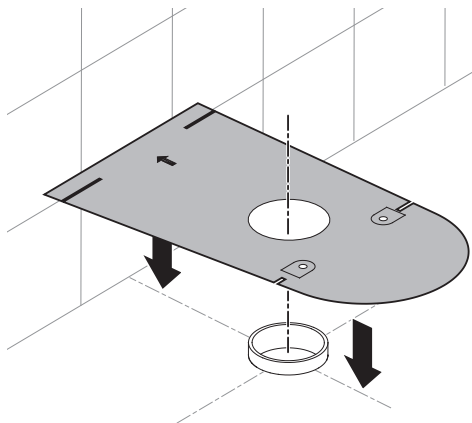


4

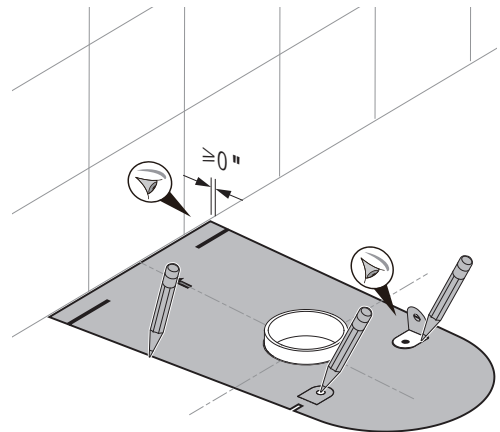


! To ensure the normal maintenance work, please make sure that the distance between the wall and the product meets the requirements.

5

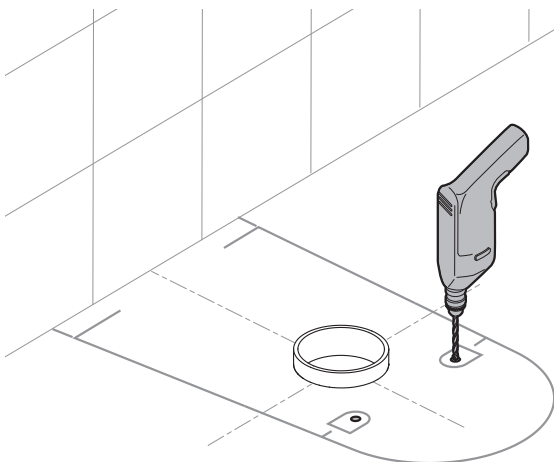


6

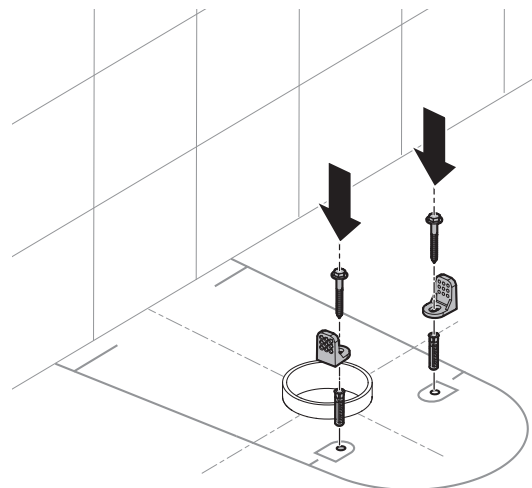


INSTALLATION


7

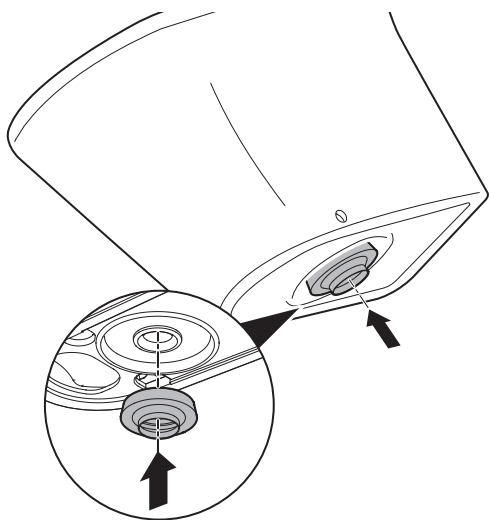


8

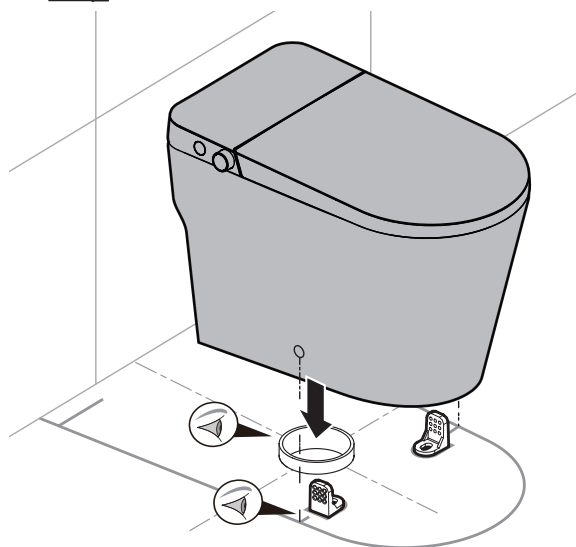


9

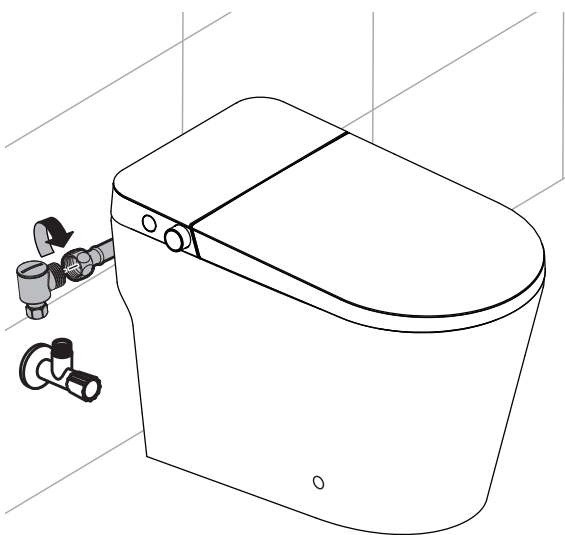



10

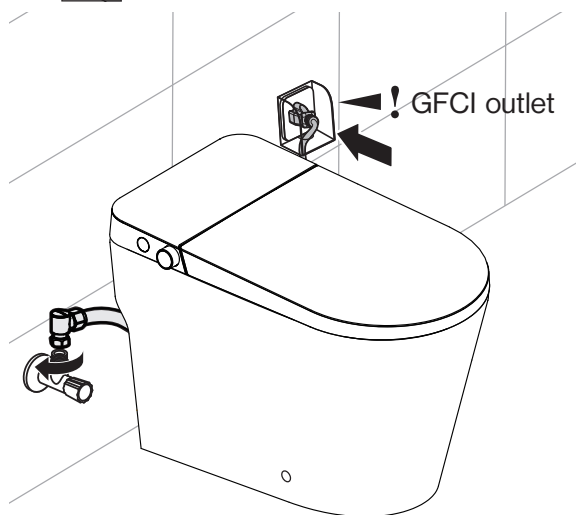



11

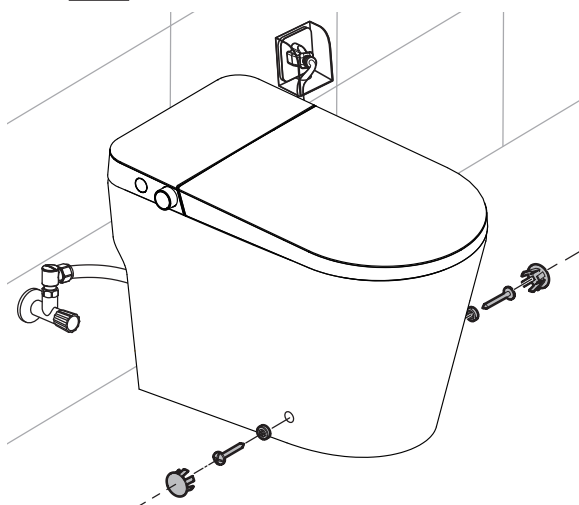

12

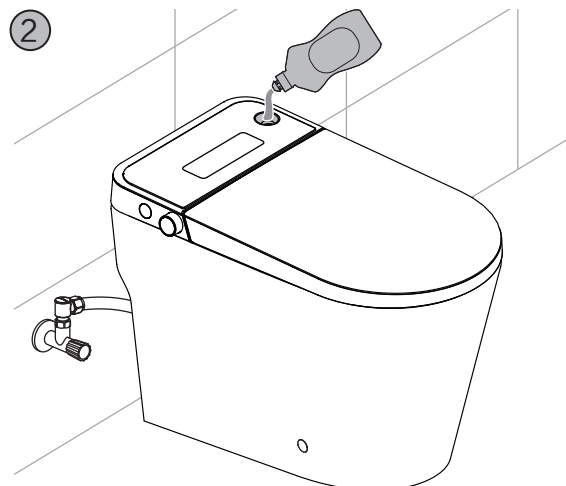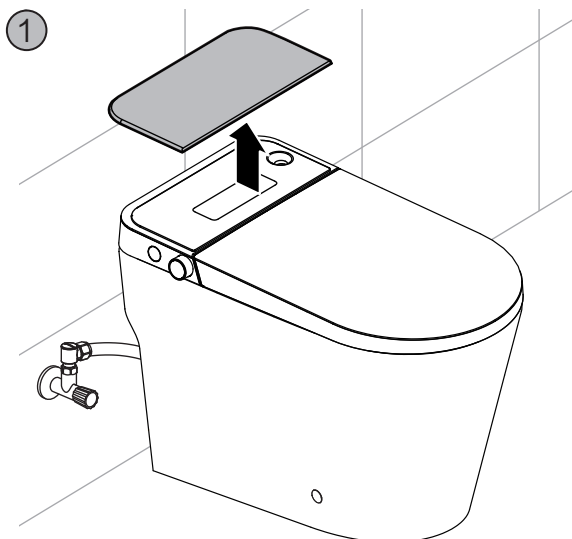


! Please add a liquid detergent that can produce a large amount of bubbles when mixed with water.

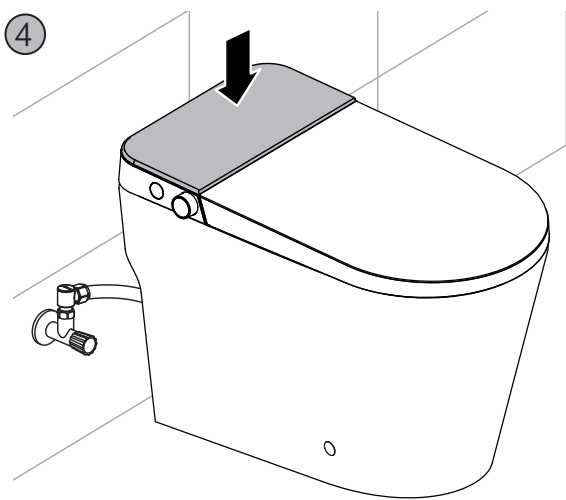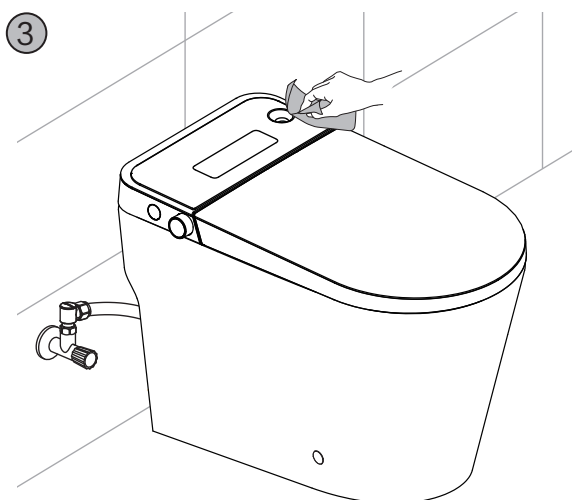


INSTALLATION


2¹

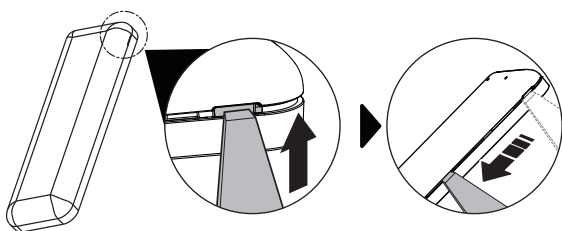


2

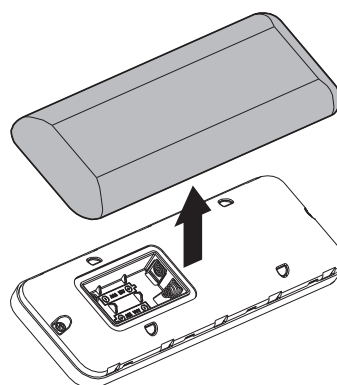


3

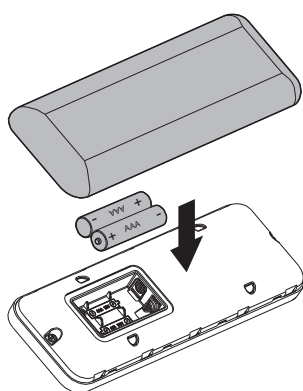


4

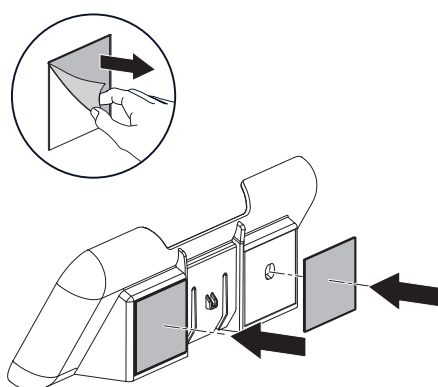


5

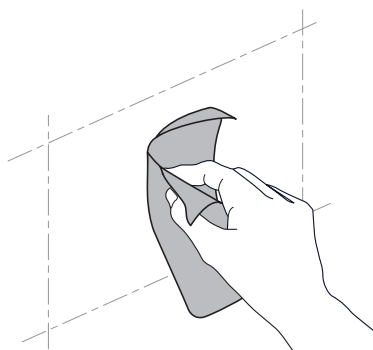


6

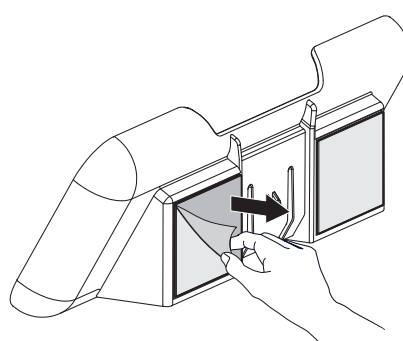

7




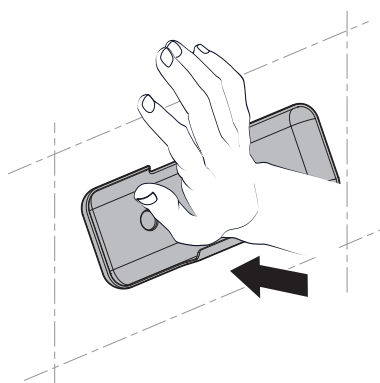


8

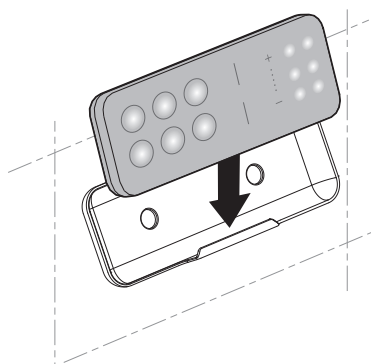


INSTALLATION


19 OPTIONAL




3




4




5



6



7



3

1




ON

2




ON

3

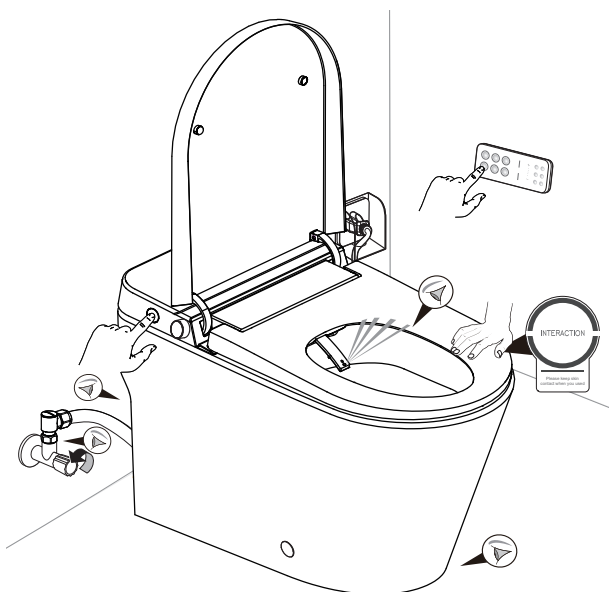

4

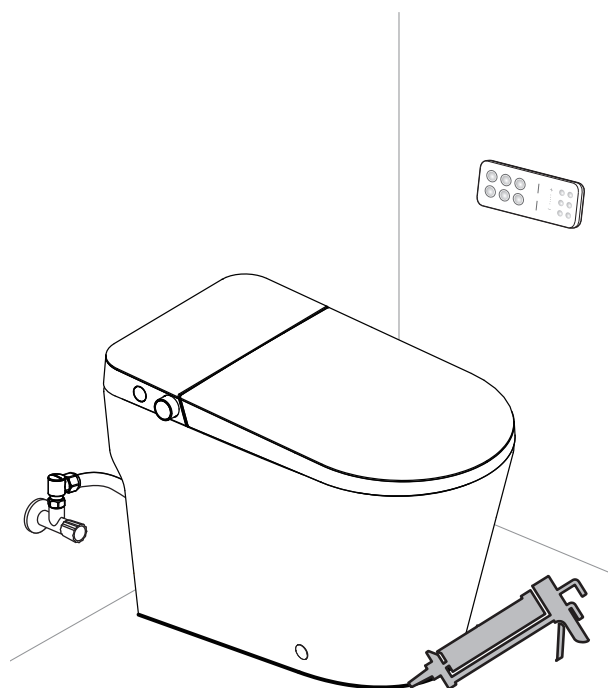

! Please check for leaks before caulking.

Place serial number sticker here
for reference



AXENT Intelligence Inc.

www.axentbath.us
support@axentproducts.com
1-949-250-4576